


DSX-Communication Connections

		TO												
		DSX-1021 Master	DSX-1022 Master	DSX-103x Master	DSX-1040 CDM w/Master	DSX-1035 Quadrplexor	DSX-485T	DSX-MCI	DSX-LAN	DSX-USB	DSX-1021 Sub	DSX-1022 Sub	DSX-103x Sub	DSX-1040 CDM w/Subs
FROM	DSX-1021 Master					1	1	1			1	1	1	1
	DSX-1022 Master					1	1	1			1	1	1	1
	DSX-103x Master					1	1	1			1	1	1	1
	DSX-1040 CDM w/ Master					1	1	1			1	1	1	1
	DSX-1035 Quadrplexor	2	2	2		2	2			2	2	2	2	2
	DSX-485T					3	3			3	3	3	3	3
	DSX-MCI	2	2	2		2	3	2			2	2	2	2
	DSX-LAN	2	2	2		2					2	2	2	2
	DSX-USB	2	2	2	2			2			2	2	2	2
	DSX-1021 Sub					3	3	3			3	3	3	3
	DSX-1022 Sub					3	3	2			3	3	3	3
	DSX-103x Sub					3	3	3			3	3	3	3
	DSX-1040 CDM w/Subs					2	2	3			2	2	2	2

To use the communication chart below, find what you are communicating from on the left followed by what you are communicating to on the top right. The intersection provides a number that corresponds to a wiring convention in the Legend.

Controller Addressing

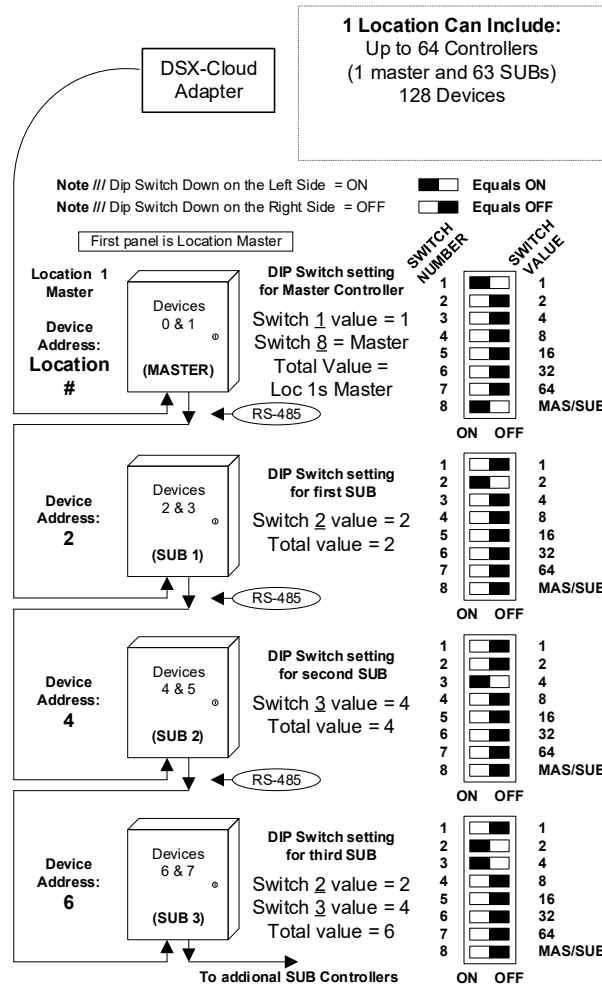

Note !!! Dip Switch at a Master panel must equal the Location #.
Note !!! Dip Switch at a SUB panel must equal Device Address of Side A.

Use this Diagram to assist you in setting the address switches on each DSX Controller. The above graphic represents location1 and the first three Sub controllers.

Note- Switch Rules!!!

- Turn the switches on and Add the values.
- Side A = even number set by the switches.
- Side B = next highest odd number.
- The Master is always device address 0 & 1.
- To set the Master address above 127 set switches 1-7 off, set switch 8 on and set the address using KB2CW.exe from the WinDSX folder.



DSX ACCESS SYSTEMS, INC.

DSX-CLOUD
QUICK REFERENCE CARD

DSX Access Systems, Inc.
10731 Rockwall Road, Dallas, Texas 75238
214-553-6140
www.dsxinc.com

DSX-Cloud

1. Connect the Adapter to the Internet capable network and to the Master Controller.
2. Open your Browser and Enter the URL given to you for your DSX-Cloud Instance.



3. At the Logon Screen enter
User Name – admin
Password – admin Press Enter
4. Go to DataBase and Enter your data in the order shown in the table below.

Order Of Entry	Items to be Defined	Located on:
1	Location (site)	Location Tab
2	Time Zones (schedules)	Hardware Tab
3	Devices (readers)	Hardware Tab
4	Outputs (locks typically)	Hardware Tab
5	Inputs (door position and rex)	Hardware Tab
6	Company (user groups, depts)	Card Holder Tab
7	Facility Code	Location Tab
8	User Defined Fields (UDFs)	Card Holder Tab
9	Access Levels	Card Holder Tab
10	Card Holders	Card Holder Tab

DSX-Cloud Adapter Connections

