



®

DSX Access Systems, Inc.

DSX-220 Noise Filter

DSX-220 Card Reader Cable Noise Filter

Card Reader Cable Noise Filter / Signal Booster. This module can be used to clean up dirty pairs of Elevator Travel Cable or to extend the distance between a reader and a controller.

Size

220TX 7.5"W x 2"H x 1.5"D


220RX 4"W x 2"H x .5"D

Power Requirements

220TX - 12V 40VA XFMR – installed and powered at Cab

220RX - 13.5VDC @ 210ma – installs and is powered at controller

DSX-220 Card Reader Cable Noise Filter Application

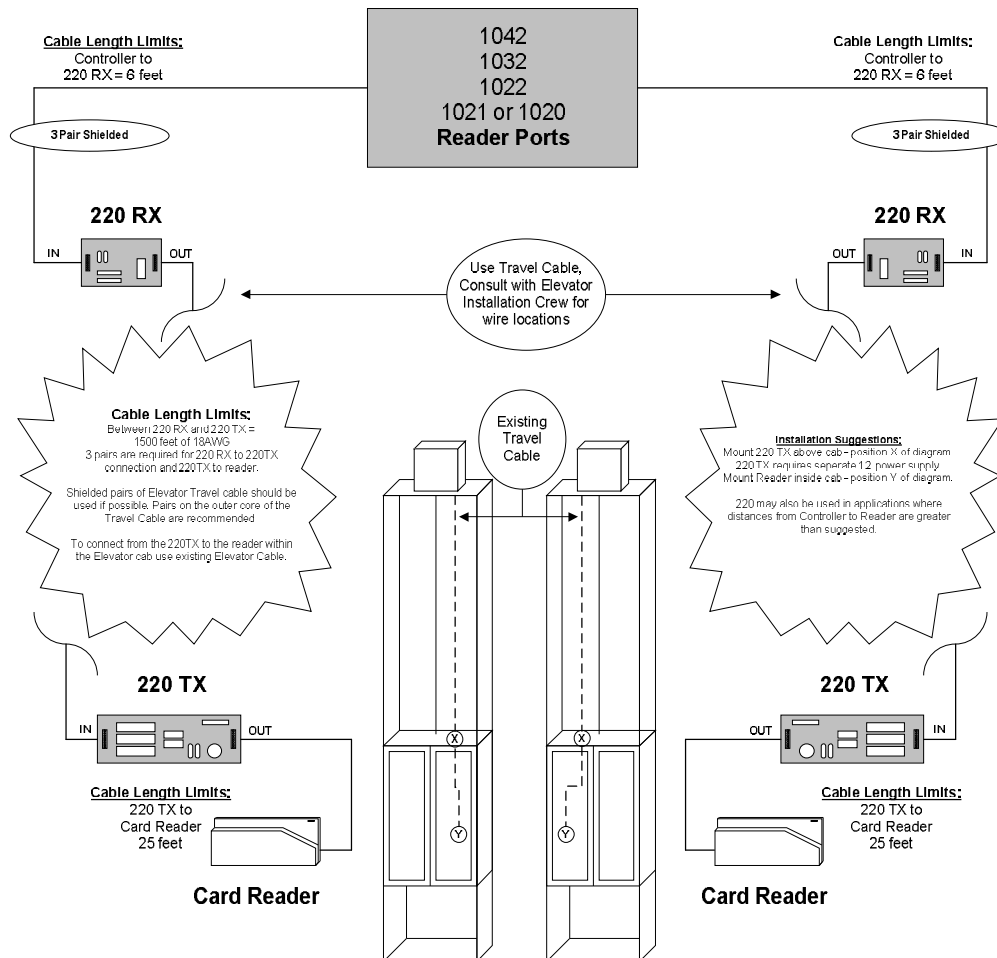

DSX-220 Typical Connections

